
Instructions for „Mistral“ erection

Dear Customer,

Congratulations on your purchase of your new Herzog awning, we wish you many happy relaxing days ahead. You have purchased a top quality product, manufactured to the highest standard using optimum materials, which will give you many years of trouble free use.

Specification:

Frame: 2 x Long fibreglass poles (11,0 mm diameter)
1 x Short fibreglass poles (9,5 mm diameter)

Roof & Walls: Roof
2 x Side walls with ventilated window & cover
1 x Front Wall


Accessories: Tent pegs, guy ropes

Caution: Please note that the fibreglass poles, when bent into place, are under **Stress and caution should be taken to prevent damage or injury.**

Erection: Draw the canvas in to the caravan awning rail, ensuring that the awning roof does not extend down the curve of the caravan roof (a).


Push one of the long fibreglass poles (Ø 11 mm) from the bottom of one of the transverse pockets (b) until the caravan side is reached. Repeat for second long pole. Secure the ends of the poles to the adjustable floor tapes (c). The poles will bend to create a tunnel effect (force is necessary to form the bend).

The ends of the short pole should now be located into the pockets on each side of the awning near the caravan wall (d). This pole is then fixed to the awning using the rubber cord, as illustrated below.

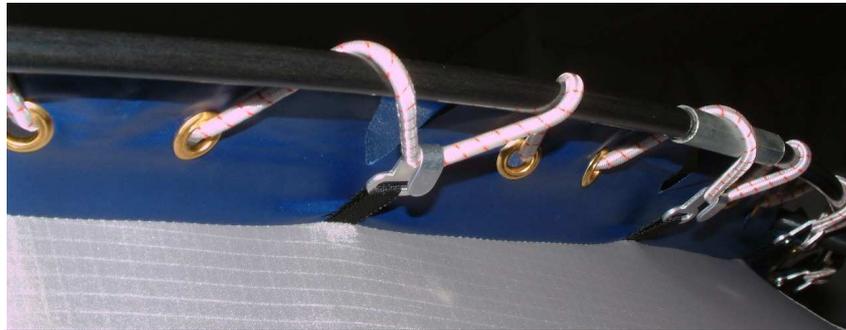

The rubber cord is pulled over the bent pole and hooked onto the small hooks. Take care as this results in high

Tipp: Start at the centre, above the door, and work towards each side.

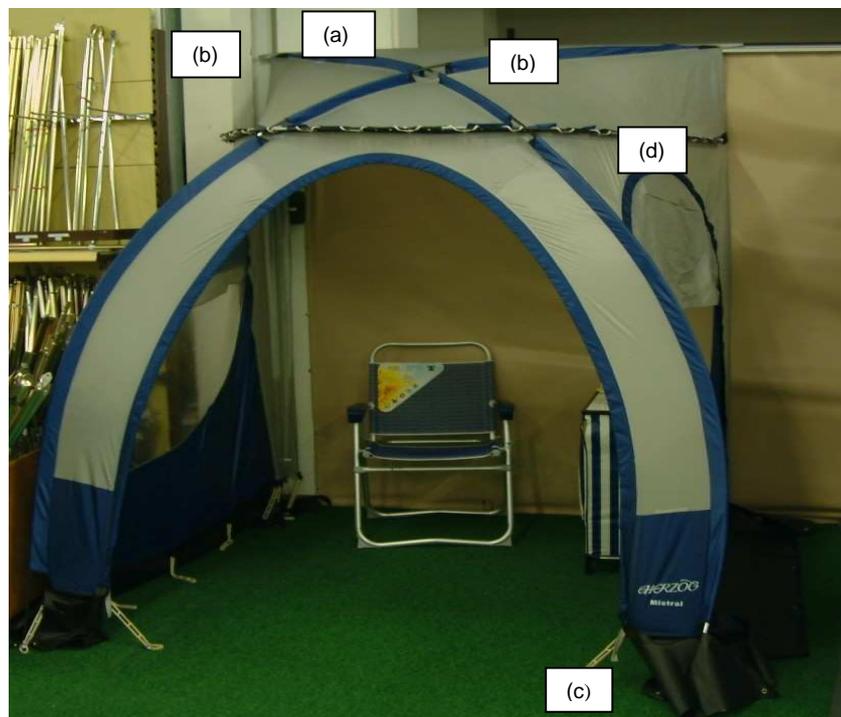

Note: The Mistral is designed as a lightweight awning, it is not constructed for permanent use all round.

Herzog GmbH & Co KG

Planen- + Zelte-Fabrik, Camping + Freizeit

Max-Eyth-Str.8 · 74366 Kirchheim/Neckar · Telefon ++49 7143/8944-0

Telefax ++49 7143/92950 · e-mail: herzog.info@herzog-freizeit.de

Internet: <http://www.herzog-freizeit.de>